

REPLACEMENT SHEET

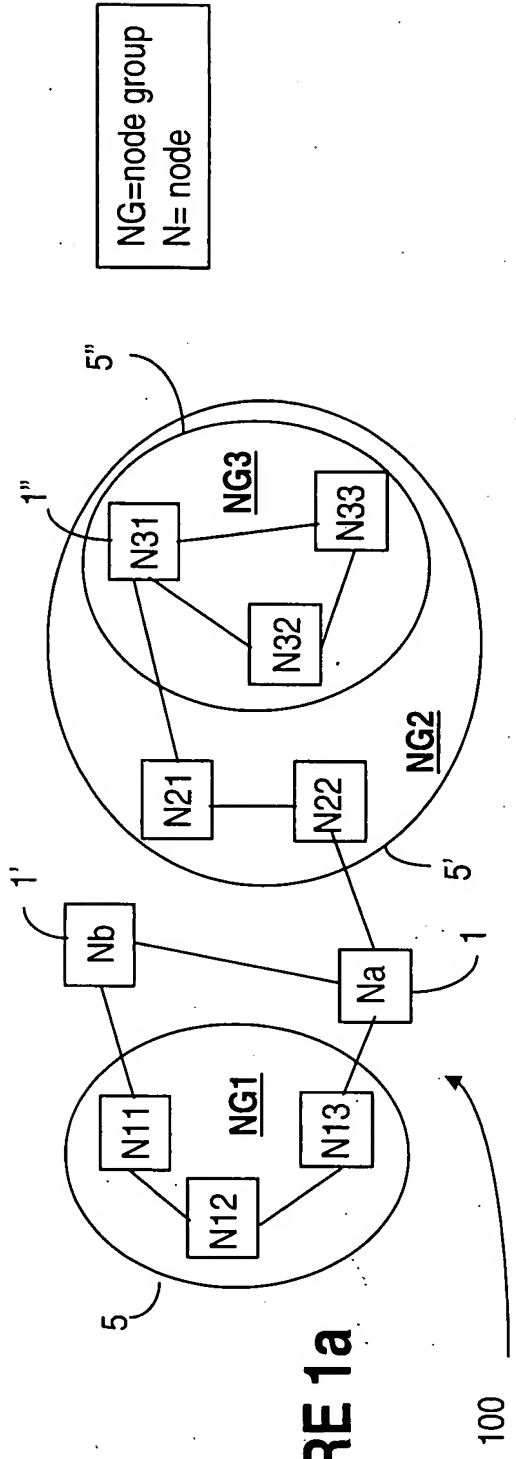


FIGURE 1a

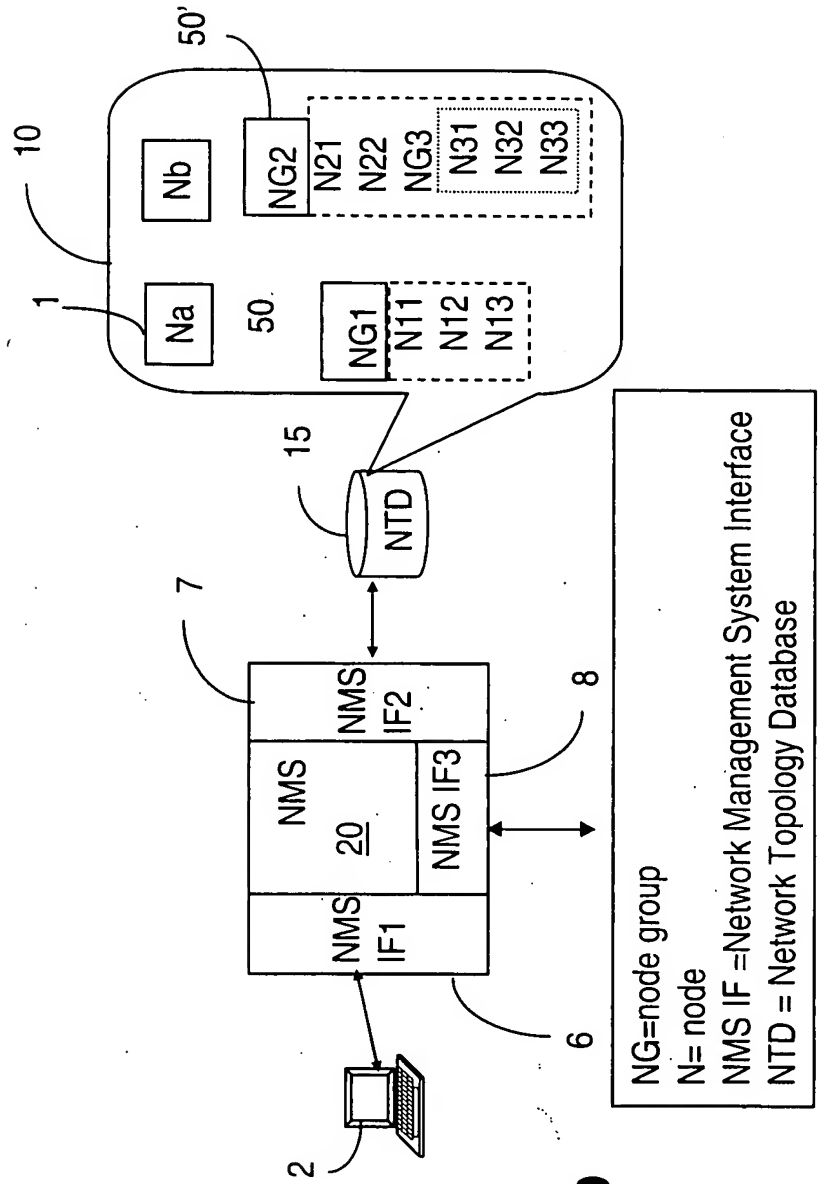


FIGURE 1b

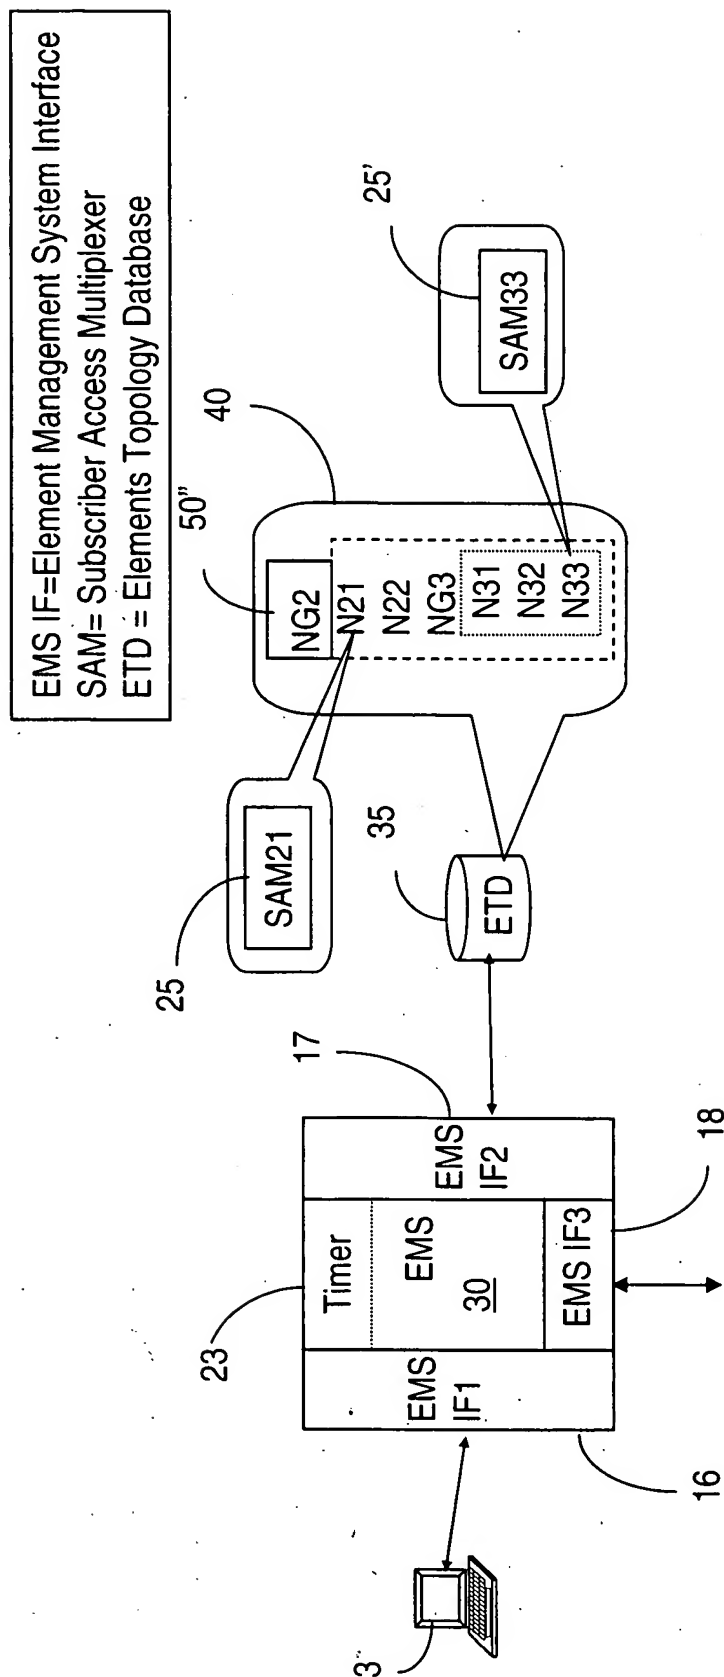


FIGURE 1c

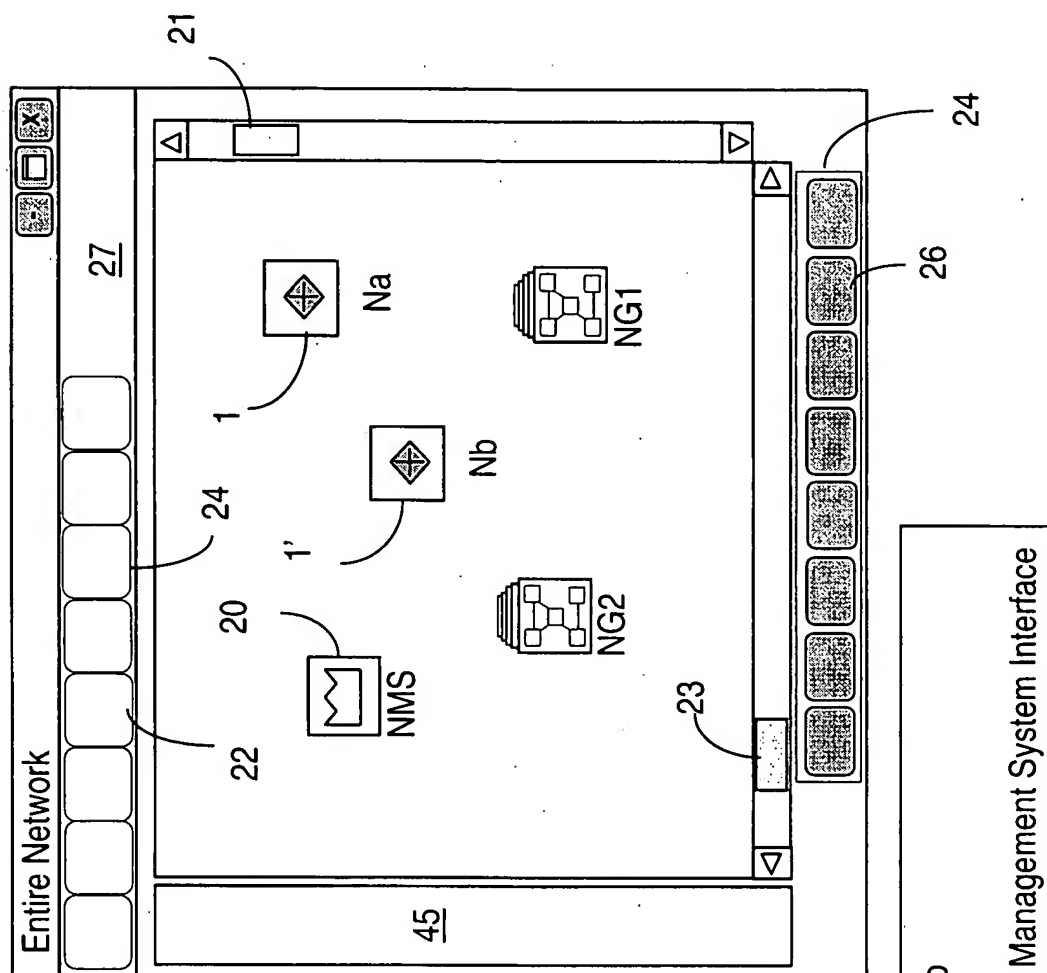


FIGURE 2a

FIGURE 2b

SNEL: Create SAM 31

SAM Information

Type 32

Name 4

Location

EML Workstation

Access Control Domain

OAM I/F at SAM

SAM IP Addr

Support BOOTP

Eth ☒ 6

ATM ☒

Addresses

MAC1

MAC2

MAC3

MAC4

Enable SNTP ☒ Synchronized with the SWS

External SNTP server

OAM I/F at EML

Ethernet Card

ATM Card

VCI

OK

Cancel

Help

EML= Element Management Layer
SNEL= SAM Workstation Network Element List
SAM= Subscriber Access Multiplexer
BOOTP= Bootstrap Protocol
SNTP= Simple network Time Protocol
SWS= SAM Working Station
ATM= Asynchronous Transport Mode
MAC= Media Access Control

FIGURE 2c

New Node

Managed By 37

41

Proceed

Cancel

39

REPLACEMENT SHEET

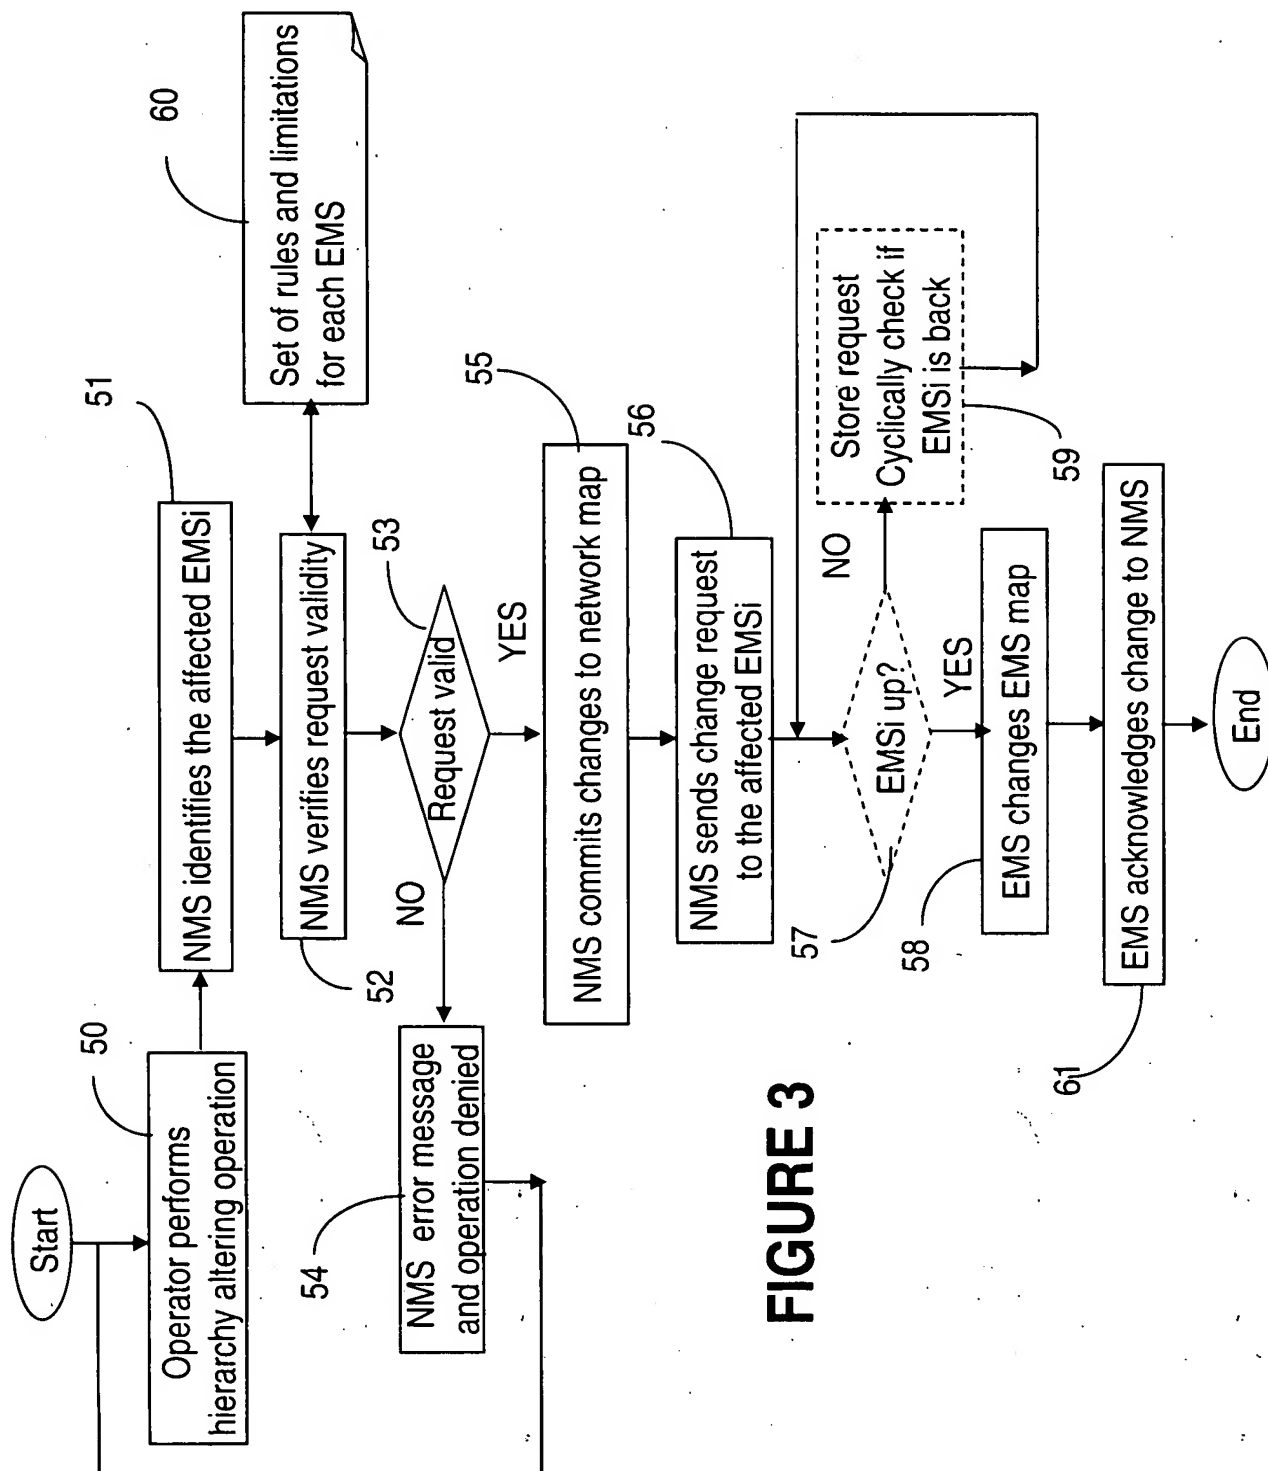


FIGURE 3